

THE SOLID VALUE POWER CENTER

7100 SERIES

A Steel-Clad Commitment to Unbeatable Value.

Parallax power centers are the most proven in the RV industry, combining filtered DC power and extensive AC/DC distribution. The 7100 Series sets a new power center standard bringing superior value to rugged and versatile power packages.

7100 models feature solid construction and quality components which stand up to the rigors of RVing ... mile after mile, year after year, in all types of climates. The 7100's distribution panel meets the requirements as a CTL Class I listed enclosed panel board, an important safety benefit. Other features include a steel chassis, ventilated steel door, fuse clips which withstand jarring and road vibration, and the industry's most trusted lower converter section with filtered DC power. The filtered power is free from spikes and surges, helping to maintain smooth operation of appliances, lighting and amenities. The full output rating is available for battery charging.

7100 Series models also are FCC Class B certified, attesting that they minimize signal interference with televisions, radios, and emergency channels.

Specifications on back.



Output amperages: 45 amps and 55 amps of filtered DC power.




Distribution panel accommodates a 30 amp main AC circuit breaker, five AC branch circuits, and 11 DC fuse circuits (circuit breakers and fuses not provided). Reverse polarity and battery fuses are provided.

-  2 Year Warranty
-  CTL Enclosed Panel Board Listing
-  Rugged, Durable Construction
-  FCC Class B Certification
-  ETL Listed; Conforms to UL Std. 458




Typical Installation

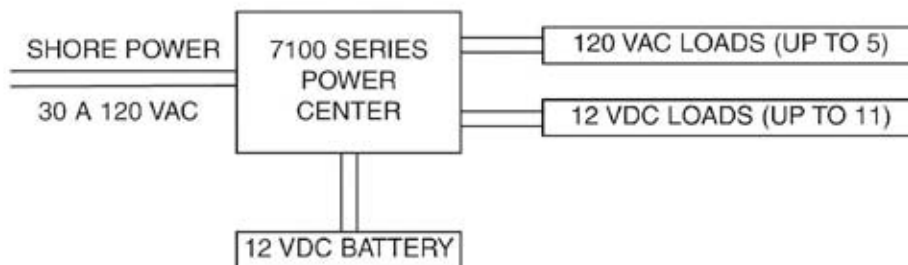

Output Load Curve (Typical 7155 model)

Typical load curve: With no load, output voltage is 13.8 VDC nominal to recharge a 12-volt battery to 100%.

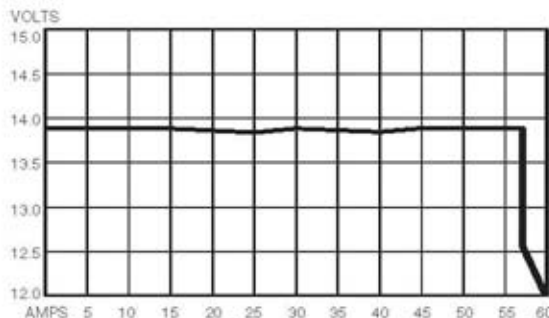

7100 Series Specifications

Model Number	Item Description	AC Input	DC Output		Dimensions			UPC No.	
			Volts	Amps	Ht.	Wdth.	Depth		
7145	Power Center with 45ADC converter/charger	105-130VAC/ 60 Hz/ 725W	14.0 max. @ no load 13.6 max. @ full load	45	11-3/4"	14"	7"	13.5 lbs	00062-5
7155	Power Center with 55ADC converter/charger	105-130VAC/ 60 Hz/ 975W	14.0 max. @ no load 13.6 max. @ full load	55	11-3/4"	14"	7"	13.5 lbs	00063-2



100 W. 11th Street
Suite 100
Anderson, IN 46016
800-443-4859 Fax 765-608-5235
www.parallaxpower.com

**The Power To Bring
People & Places
Together.**