




LINEAR
CONVERTERS

LINEAR CONVERTERS

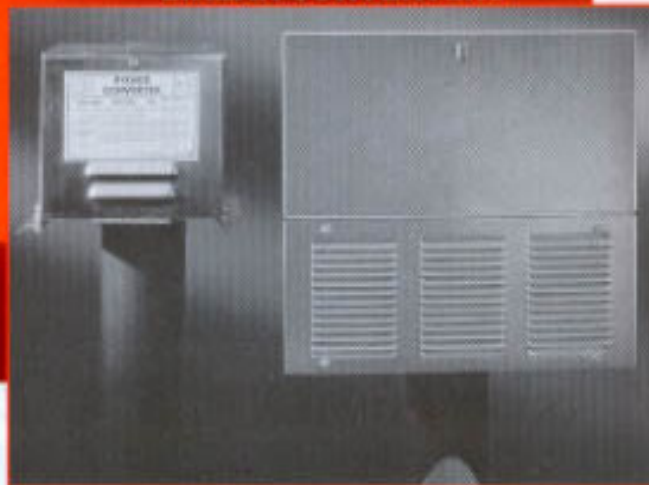

The Parallax linear converter line: 3200 Series deck mount models, and 6300 Series power centers.

Linear converters offer durability, versatility, and economy.

Power Center available with whisper quiet fan for nearly inaudible operation.

Linear converters are rugged, quiet, and economical. For RVs without sensitive electrical or electronic amenities, linear converters offer the ideal cost-effective solutions.

The linear converter product line includes 3200 Series deck mount models and 6300 Series power centers. 3200 Series converter/chargers range from 20 to 40 amps of DC output. They're available with and without DC fuse blocks. 6300 Series power centers, which feature AC/DC distribution panels and optional line generator switches, are "total electrical centers" which fit into space-saving locations. DC outputs range from 25 to 50 amps. The 6300 "Q" Series includes a whisper quiet cooling fan for nearly inaudible operation, and a 12-amp battery charger.

Linear converter/chargers emit very little radio frequency interference, and both the 3200 and 6300 Series provide automatic switching between the converter and battery.

All Parallax products carry a standard two-year warranty. UL/CUL listed.

Specifications on back.



6300 power centers combine a lower converter/charger section with an upper AC/DC panel.



6300 "Q" Series power centers feature a whisper quiet cooling fan and 12 amp battery charger.

3200 Series

- Output range from 20 to 40 amps.
- Available with and without 12-volt DC fuseblocks.
- Available with and without 120 VAC line cords.
- Some models feature automatic switching between converter and battery.



6300 Series

- Output range from 25 to 50 amps.
- 30 amp AC panel board accommodates 5 branch circuits and main breaker. (Circuit breakers not included.)
- 12-volt DC panel board includes 3 filtered circuits -- battery required -- and six unfiltered circuits. (Fuses not included.)
- Charger voltage: 13.8 with no load; 11.5 with full load.
- Optional line generator switch.



Linear Converter Specifications *UL/CUL listed*

3200 Series Deck Mount Converter/Chargers

Model	DC Output	Description	Wdth.	Ht.	Depth	Wt./lbs.
3220	20 amps	Converter/6 amp charger	7.25"	6"	12"	15
3230	30 amps	Converter/6 amp charger	7.25"	6"	13-5/8"	17
3240	40 amps	Converter/6 amp charger	7.25"	6"	13-5/8"	18

6300 Series Power Centers

6325 Model provides a 3 amp continuous load charger amperage.

"Q" Models provide whisper quiet cooling fan and 8 amp continuous load charger amperage.

Model	DC Output	Description	Wdth.	Ht.	Depth	Wt./lbs.
6325	25 amps	Converter/6 amp charger	14"	11.75"	7"	21
6332Q	32 amps	Converter/12 amp charger	14"	11.75"	7"	21
6345Q	45 amps	Converter/12 amp charger	14"	11.75"	7"	23
6350Q	50 amps	Converter/12 amp charger	14"	11.75"	7"	26

Cut-out size of above 6300 power center models: 12-1/2" x 10-7/8"

Two door colors available: brown and black

Replacement converter/charger sections

6325R	25 amps	Converter/6 amp charger	14"	11.75"	7"	17
6332QR	32 amps	Converter/12 amp charger	14"	11.75"	7"	18
6336QR	36 amps	Converter/12 amp charger	14"	11.75"	7"	19
6345QR	45 amps	Converter/12 amp charger	14"	11.75"	7"	22
6350QR	50 amps	Converter/12 amp charger	14"	11.75"	7"	22

(Sizes shown for above sections reflect entire power center unit)

Specifications subject to change without notice.



Copyright 2001 Parallax Power Components LLC

112 E. Union Street
 Goodland, IN 47948
 219-297-3111
 FAX 219-297-2306
www.parallaxpower.com