



## Our Distribution Panels Carry The UL CTL Enclosed Panelboard Listing, The Same Listing You Trust at Home.



CLASS CTL  
ENCLOSED  
PANELBOARD



CLASS CTL  
ENCLOSED  
PANELBOARD




Parallax distribution panels and Power Centers provide RVs with the same quality and integrity you find in the finest homes, and in heavy duty industrial applications as well. This commitment is displayed by the UL CTL Enclosed Panelboard Listing, a trusted benchmark regarding the standards for electrical distribution panels.

When you rely on Parallax panels, you're providing customers the quality they deserve ... why settle for less than you would have in your own home?

Parallax panels offer advantages in addition to the UL listing. They endure mile after mile down the most rugged roads while maintaining maximum circuit breaker and fuse performance. Fuse clips provide more contact area per fuse, preventing loosening of fuses which can occur from jarring and road vibration.


Pressure connectors rather than screws are used for connections, making installation easier. ATC fuses operate cooler than glass-type fuses while eliminating nuisance blowing.

**Model 80**

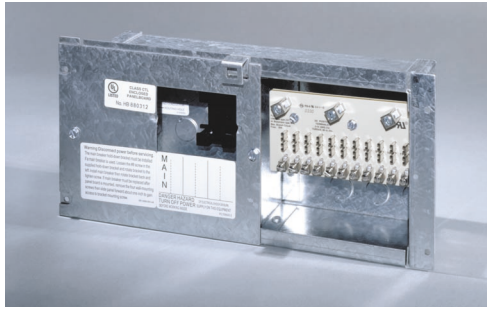

- Accommodates 30 amp main breaker (not included)
- Up to five AC branch circuits
- Up to 11 DC branch circuits
- Optional ATS line generator switch mounts to back
- For 30A 120VAC service

**Model 100**

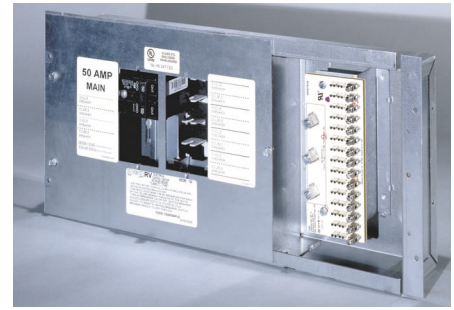

- 50 amp main breaker included
- Up to 12 AC branch circuits
- Up to 15 DC branch circuits
- Easy-to-read display panel
- For 50A 120/240VAC service

**Decorative Door**



**Optional ATSTM Line Generator Switch for Model 80 and 80D**



Parallax ATSTM Line Generator Switches provide safe, automatic changeover of power between generator and shoreline power. Mounts directly onto the back of Parallax Model 80 and Model 80D distribution panels.

**Specifications**

Part #	Max. AC Input	Max. AC Branches	Max. DC Circuits	Width	Height	Depth	Wt.	UPC No. 1-80347-
80	30A/120VAC	5	11	13-7/8"	6-9/16"	3-1/8"	8 lbs.	00068-7
80D	30A/120VAC	5	11	14-1/4"	7-3/8"	3-3/4"	8 lbs.	00070-0
100	50A 120/240VAC	12	15	20-5/16"	10-9/32"	3-3/8"	15 lbs.	00074-8
100D	50A 120/240VAC	12	15	20-3/8"	10-1/4"	3-7/8"	15 lbs.	00076-2

Add suffix "A" to part number for the Line Generator Switch option (only available on Models 80 and 80D).  
 Add suffix "D" to part number for the Decorative Door option.



**Sales Office**  
 425 Sycamore Street  
 Anderson, IN 46016  
 800-443-4859 • Fax 765-608-5036  
 www.parallaxpower.com

**Corporate Office**  
 5508 128th Street E.  
 Puyallup, WA 98373